


# **SUBRACK**

# **Model Selection Manual for Subracks**

BEIJING RDEKONO ELECTRONIC EQUIPMENT CO.,LTD

Responsibility and Innovation Connection and protection

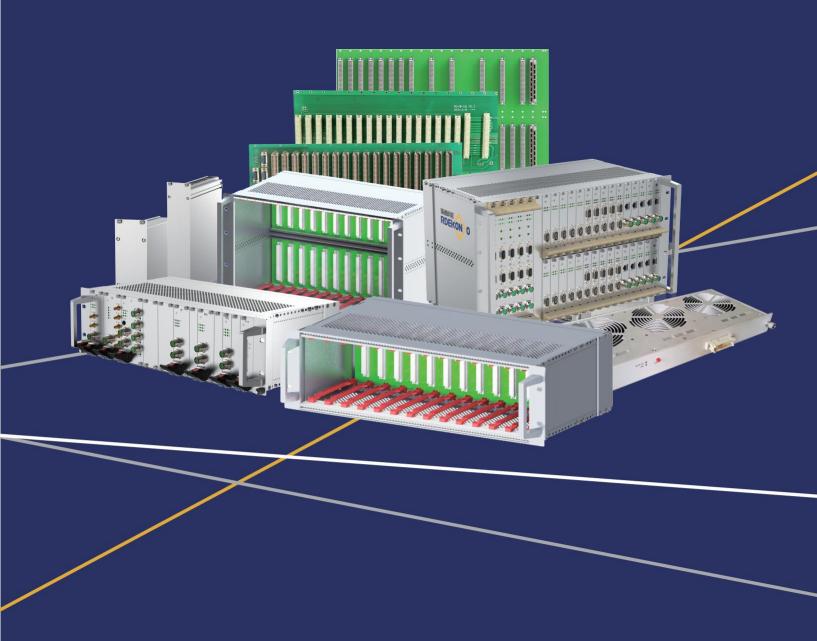





# Beijing RdeKono Electronic Equipment Beijing Rdekono Electronic Equipment co., Ltd



Beijing Rdekono Electronic Equipment Co., Ltd. is a scientific and technological enterprise engaged in products design and manufacturing, with national high-tech enterprise qualification and ISO TS22163 quality management system.

We have operation headquarters and R&D center in Beijing, a parts processing center in Cangzhou, and a complete equipment manufacturing center in Tianjin. Rdekono has a professional design team based on the complete equipment engineering technology. Rdekono has multiple technology integration design capabilities and focuses on the R&D of complete equipment system. Our technical scope includes usability design, structural design, heat dissipation design, electromagnetic shielding design, power distribution design, reliability protection design and other professional fields.

Our technical development concept is -profit users and save manufacturing cost. Through design innovative and advanced manufacturing technology, we can provide customers with complete services from product design, mechanical manufacturing to electrical and mechanical parts assembly. Rdekono is committed to helping our customers improve product competitiveness and reduce development and production costs, shorten the development cycle, and achieve market goals fast.

Mission: Integration of innovation, excellence, development and manufacturing of competitive products.

Enterprise vision: TO become a first-class electronic mechanical structure solution supplier.

Core values: Achieve cus TO mer value, improve employee welfare, return TO all shareholders.





A Se	ries Subracks······1~6
	Type A-I Subrack······1
•	Type A-I Subrack······1
•	Horizontal Carrying Handle · · · · · · · · · · · · · · · · · · ·
•	Rubber foot cover · · · · · · · · · · · · · · · · · · ·
•	Installation of corner rails · · · · · · · · · · · · · · · · · · ·
	M4 Threaded insert · · · · · · · · · · · · · · · · · · ·
	Grounding Connection Kit······4
	Ventilation front panel······4
	Cover plate,482.6mm (19") · · · · · · · · · · · · · · · · · · ·
	Hinged cover plate, horizontally hinged · · · · · · · · · · · · · · · · · · ·
	Hinged cover plate, rotatable · · · · · · · · · · · · · · · · · · ·
	Hinged · · · · · · · · · · · · · · · · · · ·
	Drawer for 482.6 mm (19") with base plate · · · · · · · · · · · · 6
	Set screw M6······6

#### **Series Subracks** Α



H

# Type A-I Subrack

EK+&EG+ PRO EK&EG PRO Series Subracks Series Subracks

BEK&BEG PRO Series Subracks

Handle specification and accessories

Series Subracks Series Subracks and accessories

Shielded plug-in units Series Subracks

Protective VERO racks Series Subracks

CASE Series Subra

Rugged Subracks Side nanel

IN-S Series Subracks

Subracks Accessories

Panel component

Order no. and page Table


- The subrack is used as a desktop case
- The subrack is equipped with VC legs to prevent the chassis from sliding after stacking
- Composite standard plug-in box can be installed inside the chassis
- When supplying: the box has been partially assembled
- Standard: 60297-3
- When the non ventilated form is selected, the protection grade is IP42

#### Material and finish

- Cover plate: 5052 aluminum plate, chromate passivation/painting
- Side plate: 6063 aluminum profile, painted
- Beam: 6063 aluminum profile, painted
- Installation angle rail: 6063 aluminum profile, chromate passivation/painting (Color can be customized)

#### Accessories (Optional models)

Item	Name	Qty
1	Cover plate	2
2	Vertical bar	4
3	Cross member	4
4	Side member	4
5	Liner plate	2
6	Lnstallation of corner rails	2
7	Leg	8
8	Connecting bar	4
9	Corner connector	8
10	Mounting strip	4

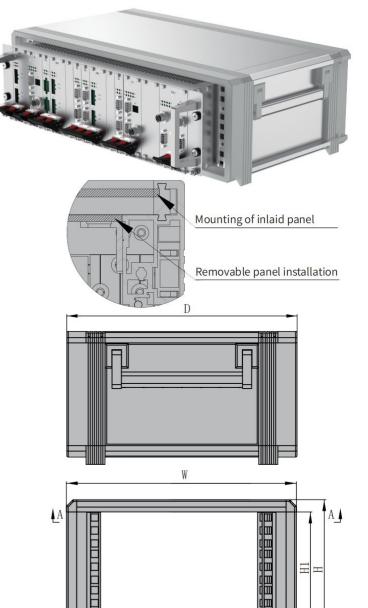

Order i	inform	nation										9
Height H	Width W		Height H1(mm)	Width W(mm)	Model	Depth D 300mm	Depth D 400mm	Depth D 500mm	Model	Depth D 300mm	Depth D 400mm	Depth D 500mm
20	42TE	120	90	321	Perforated	01230042	01240042	01250042	Without holes	02230042	02240042	02250042
20	84TE	120	90	534	Perforated	01230084	01240084	01250084	Without holes	02230084	02240084	02250084
30	42TE	164	134	321	Perforated	01330042	01340042	01350042	Without holes	02330042	02340042	02350042
3U	84TE	164	134	534	Perforated	01330084	01340084	01350084	Without holes	02330084	02340084	02350084
<b>4</b> U	<b>42TE</b>	209	179	321	Perforated	01430042	01440042	01450042	Without holes	02430042	02440042	02450042
<mark>4</mark> U	84TE	209	179	534	Perforated	01430084	01440084	01450084	Without holes	02430084	02440084	02450084
6U	42TE	297	267	321	Perforated	01630042	01640042	01650042	Without holes	02630042	02640042	02650042
6U	84TE	297	267	534	Perforated	01630084	01640084	01650084	Without holes	02630084	02640084	02650084

### Series Subracks Α



EK+&EG+ PRO Series Subracks Series Subrack

BEK&BEG PRO Series Subracks

specification

19"CUR Series Subracks

SNCF ies Subracks

VERO es Subra

Protective Pries Subracks

acks

CASE eries Subra

Guide rail

# Type A-II Subrack


- The subrack is used as a desktop case
- The subrack is equipped with VC legs to prevent the chassis from sliding after stacking
- Composite standard plug-in box can be installed inside the chassis
- When supplying: the box has been partially assembled
- Integral 5052 aluminum plate is selected as the side plate
- Standard: 60297-3
- When the non ventilated form is selected, the protection grade is IP42

#### Material and finish

- Cover plate: 5052 aluminum plate, chromate passivation/painting
- Side plate: 6063 aluminum profile, painted
- Beam: 6063 aluminum profile, painted
- Installation angle rail: 6063 aluminum profile, chromate passivation/painting (Color can be customized)

#### Accessories (Optional models)

Item	Name	Qty
1	Cover plate	2
2	Vertical bar	4
3	Cross member	4
4	Side member	4
5	Liner plate	2
6	Lnstallation of corner rails	2
7	Leg	8
8	Connecting bar	4
9	Corner connector	8
10	Mounting strip	4
11	Side panel	8/12/16
12	Horizontal Carrying Handle	2

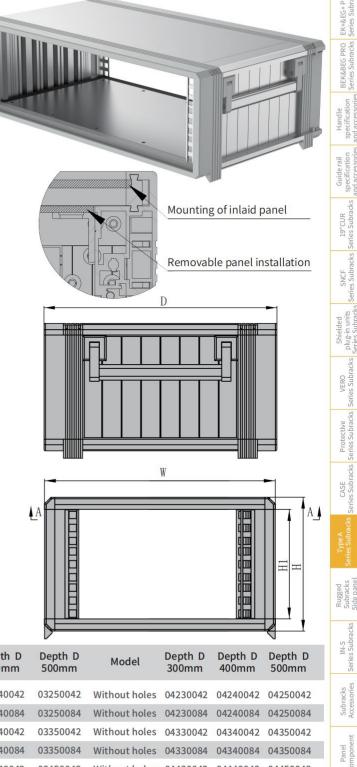

#### Order information

								-				-	S P
Heigh H	t Width W	Height H(mm)	Height H1(mm)	Width W(mm)	Model	Depth D 300mm	Depth D 400mm	Depth D 500mm	Model	Depth D 300mm	Depth D 400mm	Depth D 500mm	IN-S Series Sub
20	42TE	120	90	321	Perforated	03230042	03240042	03250042	Without holes	04230042	04240042	04250042	Subracks Accessories
2U	84TE	120	90	534	Perforated	03230084	03240084	03250084	Without holes	04230084	04240084	04250084	Sub Acce
3U	42TE	164	134	321	Perforated	03330042	03340042	03350042	Without holes	04330042	04340042	04350042	nt
3U	84TE	164	134	534	Perforated	03330084	03340084	03350084	Without holes	04330084	04340084	04350084	Panel mponent
4U	42TE	209	179	321	Perforated	03430042	03440042	03450042	Without holes	04430042	04440042	04450042	COTT
4U	84TE	209	179	534	Perforated	03430084	03440084	03450084	Without holes	04430084	04440084	04450084	r no. e Table
6U	42TE	297	267	321	Perforated	03630042	03640042	03650042	Without holes	04630042	04640042	04650042	Order nu
6U	84TE	297	267	534	Perforated	03630084	03640084	03650084	Without holes	04630084	04640084	04650084	Ou



#### Type A Subrack accessories


#### Horizontal Carrying Handle

- For easy and safe transportation
- Supplementary installation available
- Load resistance 30KG/pzzz
- Includes mounting fixings



#### **Rubber foot cover**

Can be supplemented by mounting on Type A subrack feet to avoid sliding of the case on a smooth plane



#### Material and finish

- Side section: zinc die-cast, painted, color similar to RAL7035
- Middle part: Extruded aluminum profile, painted, color similar to RAL7035

#### Order information

Depthmm	Qty/UP	Order no
300	2	00100100
400	2	00100101
500	2	00100102

#### Material and finish

- Soft PVC, Shore hardness 60°.
- Color RAL7035

#### Order information

Qty/UP	Order no
12	00100103

#### Installation of corner rails

- Depth adjustable with 12.5 pitch for mounting rack mount devices or panels in Type A Subrack
- Mounting plates with threaded holes allow for different depths of mounting of component boxes/rack-mounted devices
- Includes mounting brackets



#### Material and finish

Aluminum, anodized treatment

#### Order information

Height	Qty/UP	Order no	
10	4	00100104	
2U	4	00100105	
3U	4	00100106	
4U	4	00100107	
5U	4	00100108	
6U	4	00100109	

Order no. and page Table

# A Series Subracks

# Type A Subrack accessories

#### **M4 Threaded insert**

- Used for mounting corner rails, sliding rails, mounting assemblies, etc, Can be pushed into the racking slot of the side panel
- Includes mounting fixings



#### **Grounding Connection Kit**

- For meeting the requirements of electrical safety measures, suitable for all Type A subracks
- Configuration list: threaded strip, screw, connection lead in green/yellow, toothed ring, screw nut



#### Ventilation front panel

Used for ventilation of cabinets and subracks



#### Material and finish

Extruded aluminum profile, chromate passivation

#### Order information

Height	Qty/UP	Order no
<b>1U</b>	8	00100110
2U	8	00100111
3U	8	00100112
4U	8	00100113
5U	8	00100114
6U	8	00100115

#### Order information

Qty/UP	Order no
4	00100116

#### Material and finish

Aluminum, anodized treatment

#### Order information

Width	Qty/UP	Qty/UP	Order no
482.6mm(19")	1U	3	00100117
482.6mm(19")	2U	3	00100118
482.6mm(19")	3U	3	00100119

EK+&EG+ PRO Series Subracks Series Subrach BEK&BEG PRO Series Subracks CUR SNCF s Subr VERO Ps Suhra Protective CASE s Subr Rugged Subracks Side panel

IN-S s Subra

Subracks Accessories

Panel

Order no. 1d page Table

瑞德科诺 RDEKON 0

# Series Subracks



Α

## Cover plate, 482.6mm (19")

For installation in electronic cabinets or subracks



#### Material and finish

Aluminum, anodized treatment

#### Order information

Height	Qty/UP	Order no (269.2mm)	Order no (482.6mm)
10	3	00100120	00100126
2U	3	00100121	00100127
3U	3	00100122	00100128
4U	3	00100123	00100129
5U	3	00100124	00100130
6U	3	00100125	00100131

### Hinged cover plate, horizontally hinged

For installation in electronic cabinets or subracks
Includes mounting fixings



#### Material and finish


Aluminum 3mm, anodized treatment

#### Order information

Height	Qty/UP	Width	Order no
3U	2	482.6mm(19")	00100132
6U	2	482.6mm(19")	00100133

## Hinged cover plate, rotatable

- For installation in electronic cabinets or subracks
- Includes mounting fixings



#### Material and finish

Aluminum 3mm, anodized treatment

#### Order information

Height	Qty/UP	Width	Order no
3U	2	482.6mm(19")	00100134
6U	2	482.6mm(19")	00100135

# A Series Subracks



# Type A Subrack accessories

#### Hinged

- For cover plates
- Includes mounting fixings



#### Drawer for 482.6 mm (19") with base plate

- For keyboards, operation manuals, etc. The bottom aperture plate facilitates IN-S circulation in the control cabinet and has a load capacity of 50KG. The 1U drawer can be installed by rotating 180° on the longitudinal axis so that it can be used as a bracket type countertop
- Includes sliding telescopic rails, drawer mounting kit



#### Material and finish

Zinc die castings, nickel plated

#### Order information

Qty/UP	Order no
2	00100136

# Material and finish

 Drawer material is aluminum, anodized Sliding telescopic rail: steel plate, galvanized

#### Order information

Height	Model	Order no	
<b>1</b> U	with base plate	00100137	
1U	Without base plate	00100138	
<b>3U</b>	with base plate	00100139	
3U	Without base plate	00100140	

#### Set screw M6

- Set screws for electronic rack mount, 482.6mm (19") mounting device and shield
- Includes plastic spacer



#### Order information

Name	Qty/UP	Order no
Pan head Pozidrive c/sk screwM6	100	00100141

#### **Insert screw nut**

- Fixing screws for electronic rack mounting, 482.6mm (19") mounting devices and shields can be fixed to the fixing profile 482.6mm (19") with insertion screw nuts
- For profile plate thicknesses in the range of 0.8-2.0mm. In the small error range, insertion screw nuts with a profile plate thickness of 1.2-1.5 mm should be selected for mounting devices with or without contact points with the 482.6mm (19") profile/case

#### Order information

Model	Panel Thick	Qty/UP	Order no
With contact	0.8-2.0mm	50个	00100142
Without contact	0.8-2.0mm	50个	00100143
With contact	1.2-1.5mm	50个	00100144
Without contact	1.2-1.5mm	50个	00100145

109

Order n order n



# 2023 · 7

+86-010-62451759

subrack@rdekono.com www.beijingjixiang.com 870 Baijiatuan, Wenquan TO wn, Haidian District, Beijing